


RS007/G3/AB

Heavy Duty Roller Shutter

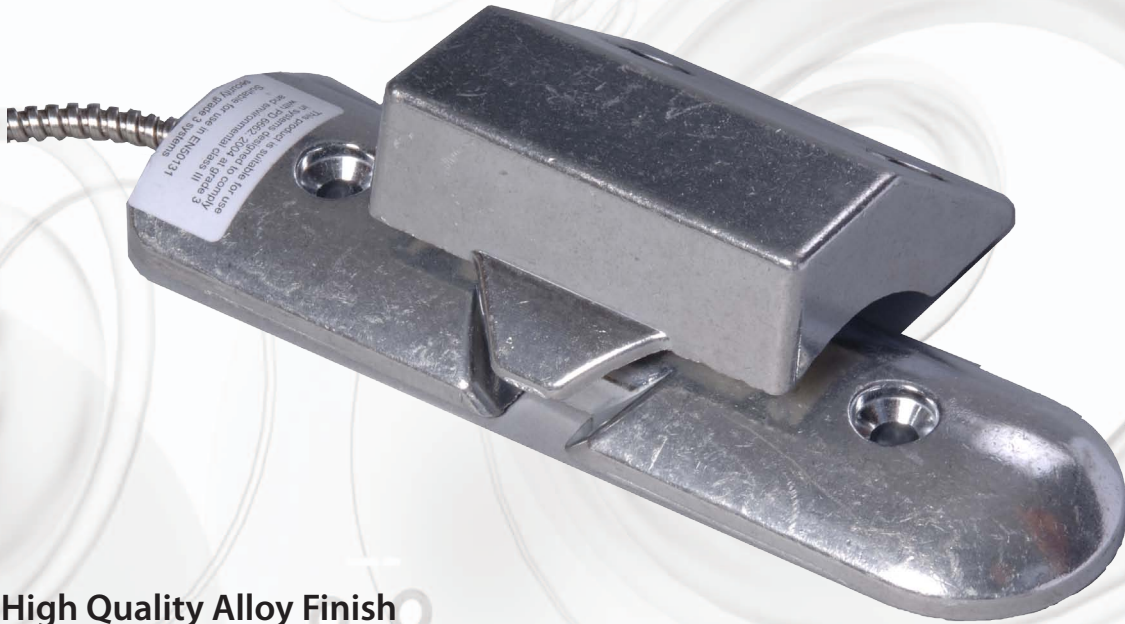

- High Quality Alloy Finish
- Selectable (A,B)
- Other resistor value available
- Optional floor tamper
- Locating Mechanism to aid alignment
- 45cm Armoured cable length
 - EN50131-2-6 Grade 3
 - Environmental Class III

Connections	8 Core x 7/0.2 Copper Cable	Switching Current	250mA @ 12Vdc	
Armoured Cable Length	450mm	Contact Material	Rhodium & Ruthenium	
Reed Switches	Multiple	Temperature Range	-15° C to +40° C	
Pull-in Gap	23mm (Y) 28mm (Z)		Tamper	
Material	Aluminium		Colours	Aluminium
Contact Size mm	175 x 50 x 14	Magnetic Interference Detection	Yes	
Magnet Size mm	83 x 86 x 32	Standards	EN50131-2-6 Grade 3	
Contact Form	SPST form A	Environmental Class	III	
Voltage Range	12v DC			



FireBrand

2Y-LINK



CQR Fire & Security
125 Pasture Road, Moreton, Wirral, CH46 4TH, UK